Anwendung/Application :

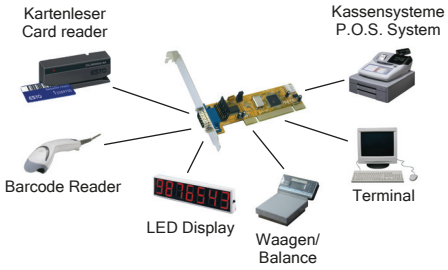

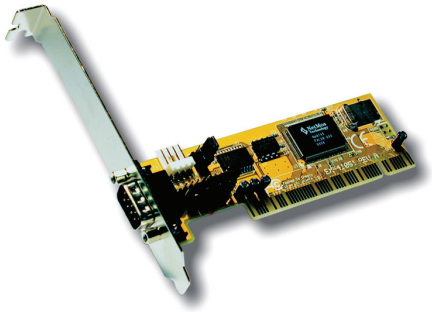

Operating System (OS):

Geprüft/Approved:

Verpackung/Packing:

1S Seriell 16C550 RS-232 Karte 32-Bit, PCI

Beschreibung :	• Die PCI I/O Karte stellt eine Serielle RS-232 High Performance UART 16C550 Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Seriellen Ausgang für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern. • +5V und +12V auf einen Pin der 9 Pin Stecker konfigurierbar POS System (Power over System).
Merkmale :	• Schnittstelle: RS-232 V.24 • FIFO Buffer: 16C550 mit 16Byte • I/O Adressen: wird vom Betriebs System vergeben • Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing • Daten Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: none, even, odd, space, mark • Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND • Unterstützt Motherboard mit 5V und 3.3V
Chip-Set :	• MosChip MCS9820
Datentransfer-Rate :	• 50 Baud bis 115.2KBaud
Anschlüsse :	• 1 x 9 Pin D-SUB Seriell Stecker • 1 x 5/12V Stecker für Anschluss vom Rechner Netzteil
Hardwaresysteme :	• PCI 32-Bit und PCI-X 64-Bit Bus
Betriebstemperatur : **Luftfeuchtigkeit :**	• 0 bis 55^{0}C (32 bis 131^{0}F) • 5 bis 95%
Abmessung / Gewicht :	• 125 x 30 mm / 150g
Lieferumfang :	• EX-41051, Treiber CD, Handbuch

1S Serial 16C550 RS-232 PCI card, 32-Bit

Description :	• The PCI I/O adapter provides one high performance 16C550-type UART compatible RS-232 serial port. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully PCI Plug-and-Play compatible and no IRQ and I/O address conflict problems. • Provides +5V and +12V over the 9 pin connector POS System (Power over System)
Feature :	• Interface: RS-232 V.24 • FIFO Buffer: 16C550 with 16Byte • I/O addresses: Setting from the operating system • Interrupt: Setting from the System BIOS with Interrupt Sharing • Data Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: None, even, odd, space, mark • Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND • Support Motherboard with 5V and 3.3V
Chip-Set :	• MosChip MCS9820
Data transfer rate :	• 50 Baud to 115.2KBaud
Connectors :	• 1 x 9 pin D-SUB serial connector • 5/12V Power connector for take the power from the power supply of computer case
Hardware system :	• PCI 32-Bit and PCI-X 64-Bit Bus
Operating Temperature : **Humidity :**	• 0 to 55^{0}C (32 to 131^{0}F) • 5 to 95%
Size / Weight :	• 125 x 30 mm / 150g
Packaging contents :	• EX-41051, Driver CD, Manual